


DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1N R1W
SEC 32
1/4
SEC 5
T1S R1W
U.S.B.&M.

LINE	BEARING	DISTANCE
L1	N 49°20'16" W	37.24'
L2	S 37°44'34" E	36.01'
L3	N 24°29'21" W	37.93'
L4	S 32°40'15" W	41.02'
L5	S 63°13'03" W	94.66'
L6	N 68°34'00" E	93.70'

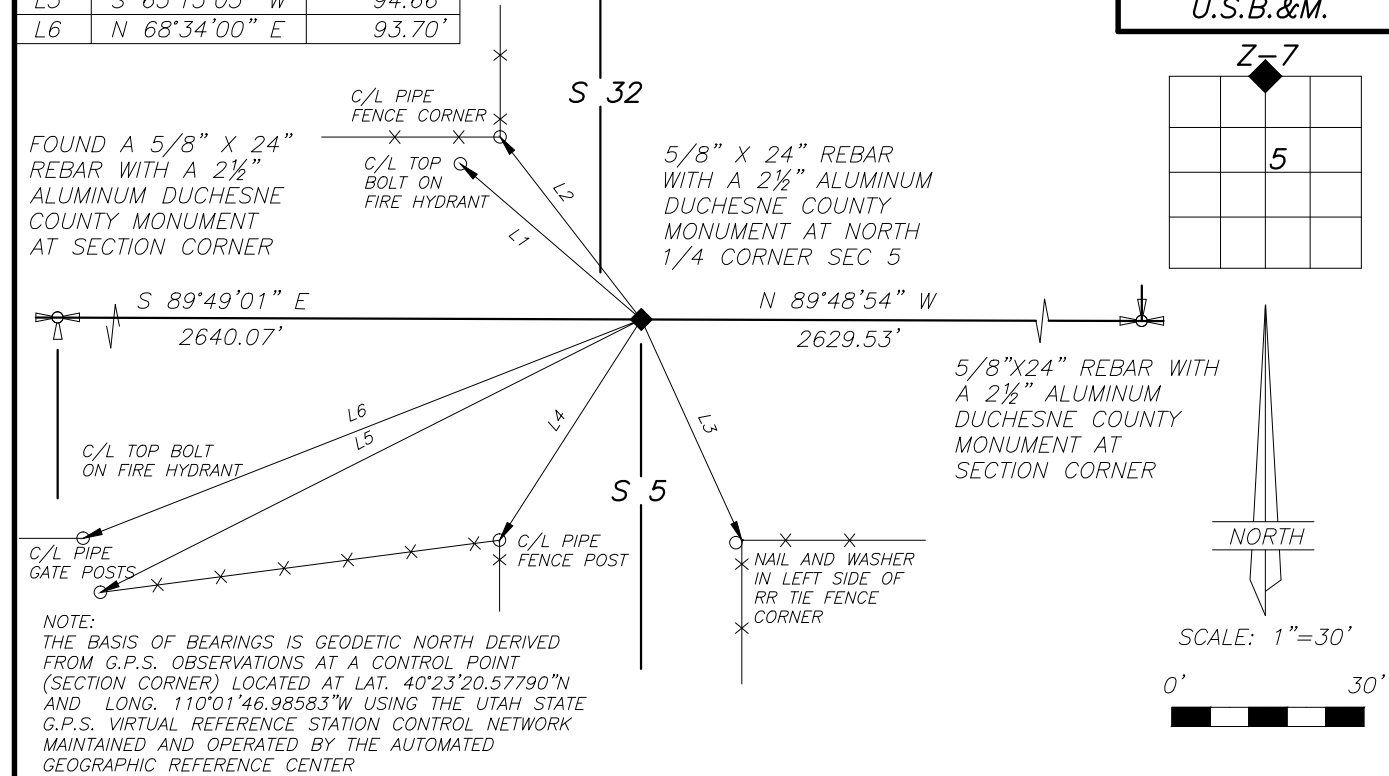

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A MAG SPIKE AND WASHER AT THE POSITION OF THE 1/4 CORNER

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET A 5/8"X24" REBAR WITH A 2 1/2" ALUMINUM DUCHESNE COUNTY MONUMENT AT THE POSITION OF THE 1/4 CORNER AFTER ROAD CONSTRUCTION



STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7329850.843
E: 2052233.568
NAVD88 EL: 6015.3'

LATITUDE: 40°25'58.71668" N
LONGITUDE: 110°01'14.01190" W
ELLIPSOID HEIGHT: 5961.88'
(GEOID 03 CONUS)

PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300010S0010W0_240700

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 28 FEB 2018

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

